


RTSS Smart Delay

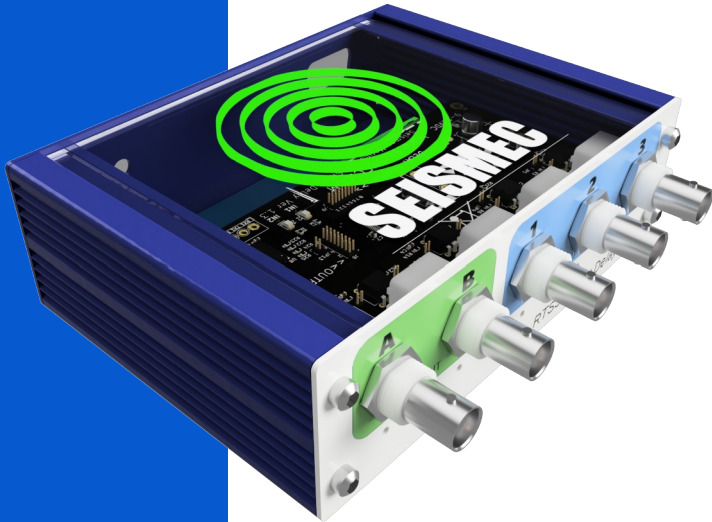


Designed for Hi-Res Survey Systems that require additional timing signals

Equipped with Two Inputs and Three Outputs that can be individually controlled to provide multiple user defined timing combinations as well as output pulse widths.

Two serial ports are available for programming as well as for logging of inter-timing events.

Features:

- User Field Programmable (Terminal or Jumper)
- Variable Output Pulse Width on all channels
- Positive or Negative Trigger
- Trigger Blanking Across Inputs
- Trigger Delay up to 16 Seconds
- Serial Output of Inter-Trigger Events
- 1U Tall Format Case
- Wall Power Brick 12Vdc

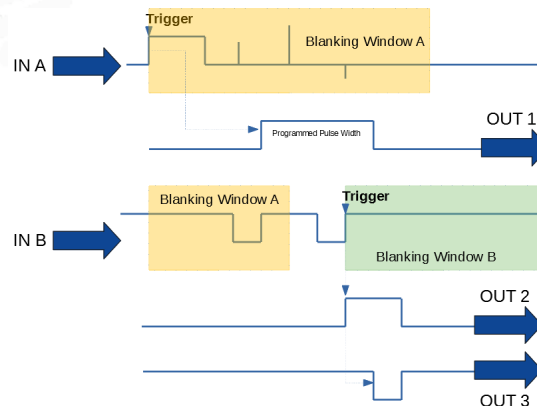

Product Part Numbers

01-09-2001 RTSS Smart Delay

sales@seismec.com

www.seismec.com

SEISMEC Marine is a Global Company focused on Exploration Technology, Vessel Conversions and New builds, Engineering Services, Marine Finance and Quality Offshore Personnel.